


# ESD SMD tweezers 110 mm form 4b stainless steel, dissipative

<b>Art.-No.</b>	5-852-13
<b>Description</b>	ESD SMD tweezers 110 mm form 4b stainless steel, dissipative
<b>Application</b>	assembly tweezers, SMD/THT, precision tweezers
<b>Specification</b>	not serrated jaws
<b>Material</b>	stainless steel
<b>Surface/Coating</b>	ESD powder coated
<b>Features</b>	stainless, antimagnetic, acid-resistant, dissipative
<b>Surface resistance</b>	$10^6$ to $10^9$ Ohm
<b>Shape</b>	TB: Tapered tips bent
<b>Icon No.</b>	TB1

## Dimensions and weight

A = 27 mm  
B = 7 mm  
C = 0.1 mm  
angle =  $40^\circ$

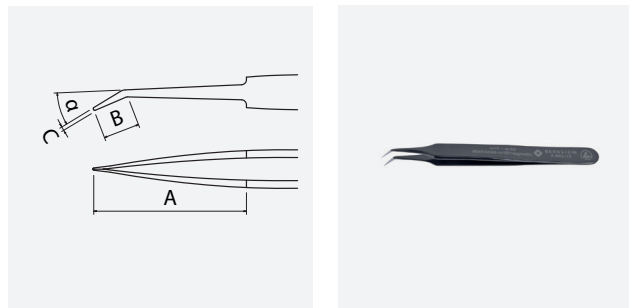

length 110 mm  
weight 14 g

## Application and technical data

Tweezers for SMD/THT technology.

Austenitic chromium-nickel stainless steel with low carbon content for good corrosion resistance (not seawater resistant).