

Ball joint vice SPANNFIX for screwing on SET1

Art.-No.**9-215-K-SET1****Description**

Ball joint vice SPANNFIX for screwing on SET1

Features

Precision ball joint rotatable 360°

steplessly lockable quick release

Quality product 100% Made in Germany

for screwing onto the workbench (space dimensions: 150×106 mm)

included 5 pairs of velcro 50 mm ribbed plastic jaws, flexible pressure lock (Dual Lock from 3M), connection to be removed again, solid, firm, stable and precise connection

clamping width 70 mm

clamping depth 38 mm

clamping pressure 1470 N

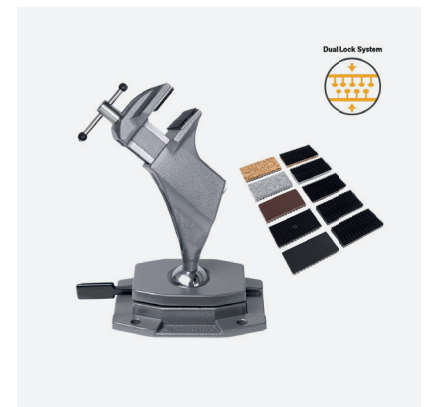
inclination angle +/-45°

incl. interchangeable jaws (felt, cork, leather, ribbed plastic, smooth plastic)

cast aluminum, powder-coated, dark gray metallic

Dimensions approx. 220 × 180 × 115 mm

weight 1310 g

**Application and technical data**

Maximum torque: ball Ø 40 mm approx. 24 Nm, ball Ø 60 mm approx. 100 Nm

Screw-on base: plate size 150 × 106 mm, through holes 4 × 9 mm

Cast aluminum parts powder coated

Steel parts chrome-plated, rust-free

With the adjusting screw on the lower seat of the ball, the movement of the ball can be adjusted from loose to very firm.

For safety-relevant parts, please note that we cannot give a guarantee of the holding forces without knowing your specific application. The ball may behave differently under different physical conditions than it does in our test laboratory in an optimal test environment.

Parts list

SET1 consists of:

9-215-K Ball joint vice SPANNFIX for screwing (velcro)

9-900-K50-FILZ Protective jaws dual lock felt/velcro 50 mm (pair)

9-900-K50-KORK Protective jaws dual lock cork/velcro 50 mm (pair)

9-900-K50-LEDER Protective jaws dual lock leather/velcro 50 mm (pair)

9-900-K50-KST Protective jaws dual lock plastic corrugated/velcro 50 mm (pair)

9-900-K50-KSTG Protective jaws dual lock plastic smooth/velcro 50 mm (pair)